




## 51BDIN/1

M x M 重型全流量球阀减速器。  
根据 EN 13828

### 尺寸

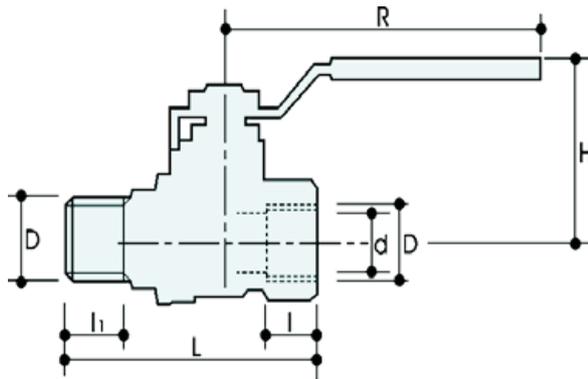

D	3/8"	*1/2"	*3/4"	*1"	*1 1/4"	*1 1/2"	*2"
d	10	15	20	25	32	40	50
H	36	39	49	61	66	82	89
l	12	17	18	21.5	23.5	23.5	28
li	12	17	18	21.5	23.5	23.5	28
L	57.5	70	79	93.5	106	117	138.5
R	75	75	95	120	120	150	150
Acc.	1	1	2	3	3	4	4
g	150	230	370	660	945	1330	2065

Tutte le filettature sono eseguite a norme ISO 7/1 o ISO 228

### 材料



本体	CuZn36Pb2As Cw617N (DIN 50930 part. 6)
阀球	CuZn36Pb2As Cw617N (DIN 50930 part. 6) 钻石抛光和镀铬。
阀杆	CuZn36Pb2As Cw614N (DIN 50930 part. 6)
压帽	CuZn39Pb3 CW614N (DIN 50930 part. 6)
密封圈	可调。
O型圈	聚四氟乙烯
杠杆	2个氟橡胶 □ PTFE 密封。 镀锌钢。

### 可选配件

51BDIN F X F, 蓝钢拉杆  
51BDIN/1 F X M, 蓝钢拉杆  
51BDIN/2 M X M, 蓝钢拉杆


### 可选手柄

51BDIN 蓝钢拉杆  
52BDIN 中铝蓝色节流杆


APPROVALS(认证)



## 压降图

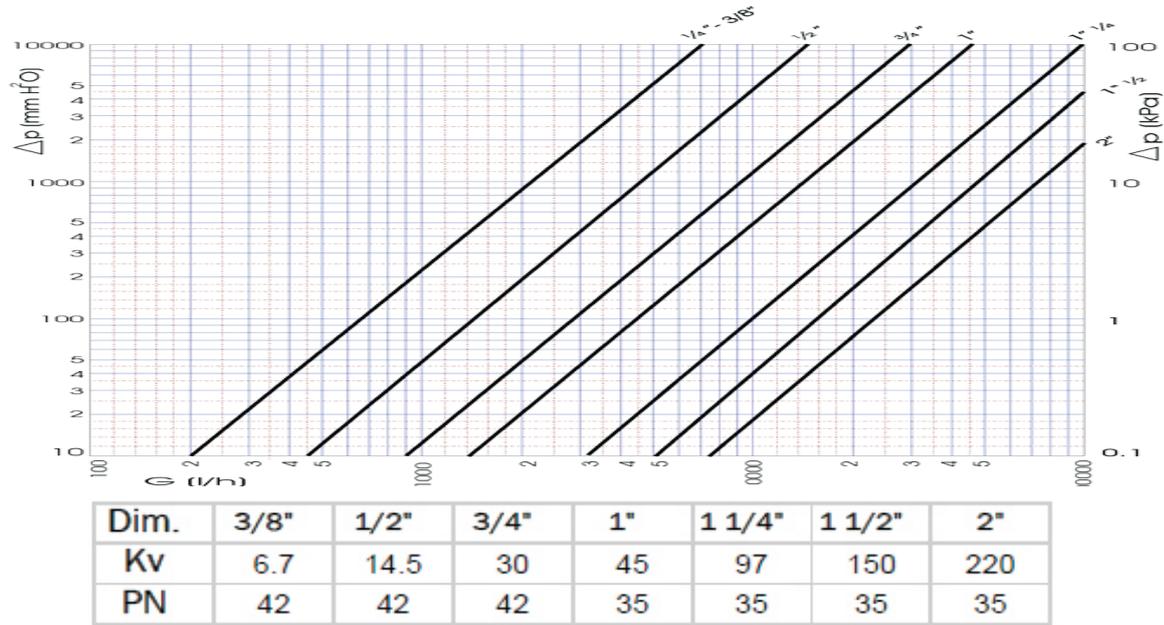

## 温度/压力图

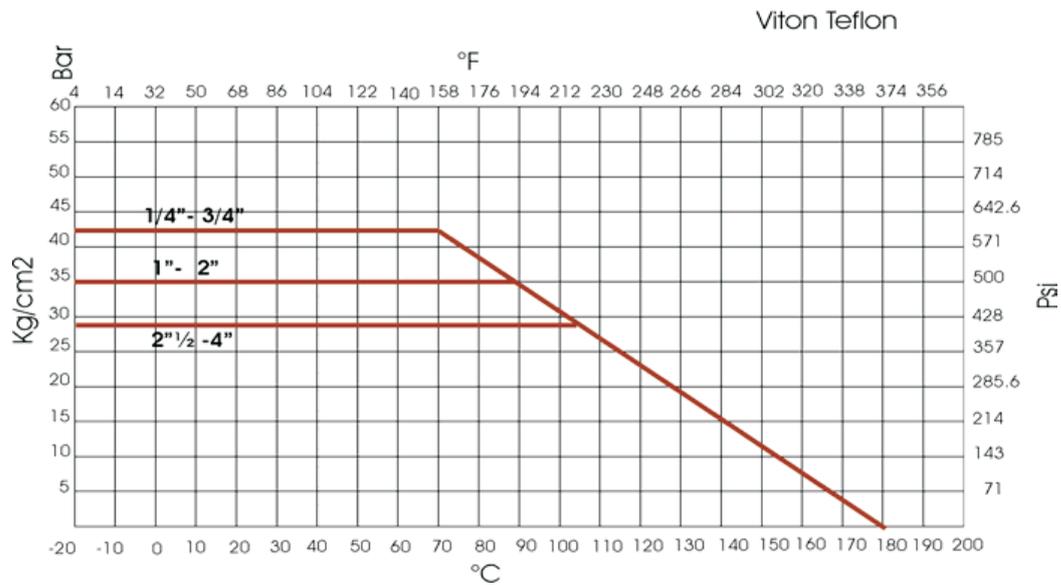

### 推荐工作温度/压力极限

30 bar - 100° C - 非冲击  
10 bar - 150° C - 非冲击