




G52/5

球阀与燃气表连接。

黄色蝶型把手

根据 EN 331

尺寸

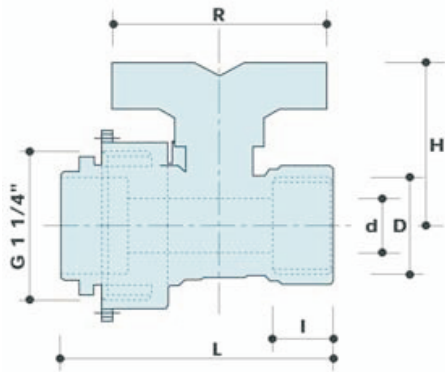

| D | 3/4" x 1 1/4" | 1" x 1 1/4" |
|----|---------------|-------------|
| d | 15 | 20 |
| H | 46 | 54.3 |
| I | 16.5 | 21.5 |
| L | 74 | 85 |
| R | 58 | 58 |
| PN | 5 | 5 |
| g | 400 | 530 |

All threads are in accordance with ISO 7/1 or ISO 228

材料



| | |
|-----|--|
| 球体 | CuZn40Pb2 CW617N (DIN 50930 part. 6) |
| 阀球 | CuZn40Pb2 CW617N (DIN 50930 part. 6) 钻石抛光和镀铬。 |
| 阀杆 | CuZn39Pb3 CW614N (DIN 50930 part. 6) |
| 螺母 | CuZn40Pb2 CW617N (DIN 50930 part. 6) |
| 压帽 | CuZn39Pb3 CW614N (DIN 50930 part. 6) 可调。 |
| 密封圈 | 聚四氟乙烯 |
| O型圈 | 2个氟橡胶® PTFE密封。 |
| 杠杆 | 铝手柄蝶阀 |

可选配件

G52/5 F X F, 黄色蝶形把手


可选手柄

G52/5 F X F, 黄色蝶形把手

APPROVALS(认证)



压降图

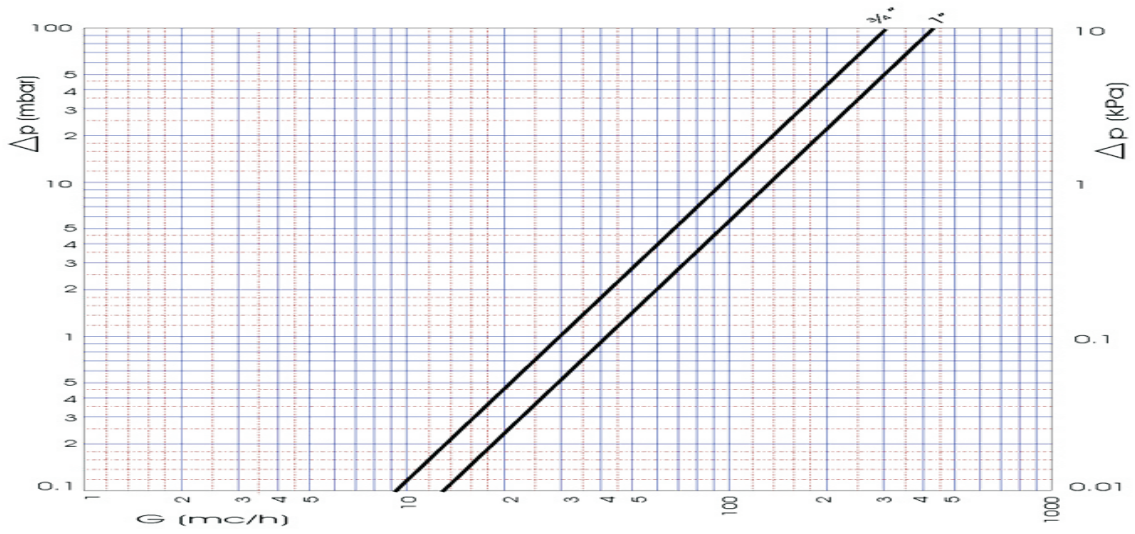

推荐工作温度/压力极限

最大. 压力 8 bar
 最小. 温度 -20° C
 最大. 温度 60° C