




50

FxF重型全流量球阀。
到UNI C.I.G., EN331。
黄色铝杆。

尺寸:

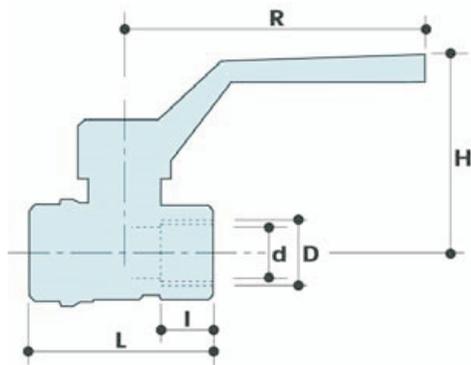

| D | 1/4" | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" |
|------|------|------|------|------|------|--------|--------|------|--------|------|
| d | 10 | 10 | 15 | 20 | 25 | 32 | 40 | 50 | 63 | 76 |
| H | 50.5 | 50.5 | 54 | 63.5 | 75.5 | 80.5 | 100 | 107 | 120 | 135 |
| I | 11.5 | 12 | 17 | 18 | 21.5 | 23.5 | 23.5 | 28 | 32 | 34.5 |
| L | 46 | 47 | 62 | 69 | 84 | 96 | 106 | 127 | 154 | 180 |
| R | 82 | 82 | 82 | 95 | 120 | 120 | 150 | 150 | 200 | 200 |
| Acc. | 1 | 1 | 1 | 2 | 3 | 3 | 4 | 4 | 5 | 5 |
| PN | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 8 | 5 | 5 |
| g | 140 | 140 | 230 | 350 | 650 | 1010 | 1340 | 2090 | 3750 | 5650 |

All threads are in accordance with ISO 7/1 or ISO 228

材料

本体 CuZn40Pb2 CW617N (DIN 50930 part.6)
 球阀 CuZn40Pb2 CW617N (DIN 50930 part.6)
 钻石抛光和镀铬。
 阀杆 CuZn39Pb3 CW614N (DIN 50930 part.6)
 压帽 CuZn39Pb3 CW614N (DIN 50930 part.6)
 可调
 密封垫 聚四氟乙烯
 O型圈 2个氟橡胶®PTFE
 手柄 铝合金杆

可选配件


G50 FXF, 黄色铝合金手扳
 G50/1FXM, 黄色铝合金手扳
 G50/2MXM, 黄色铝合金手扳




APPROVALS (认证)



降压图:

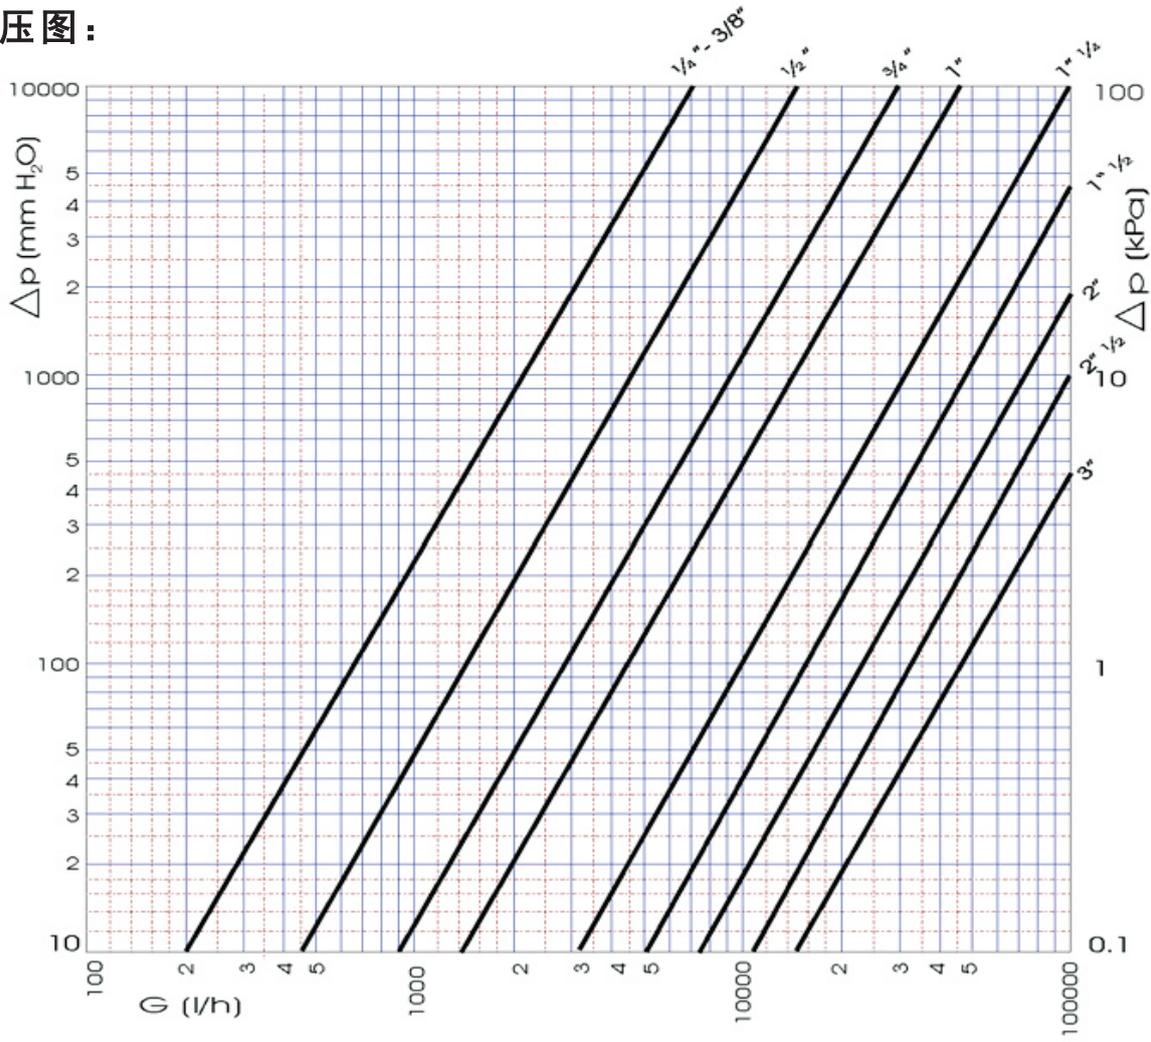

温度/压力图:

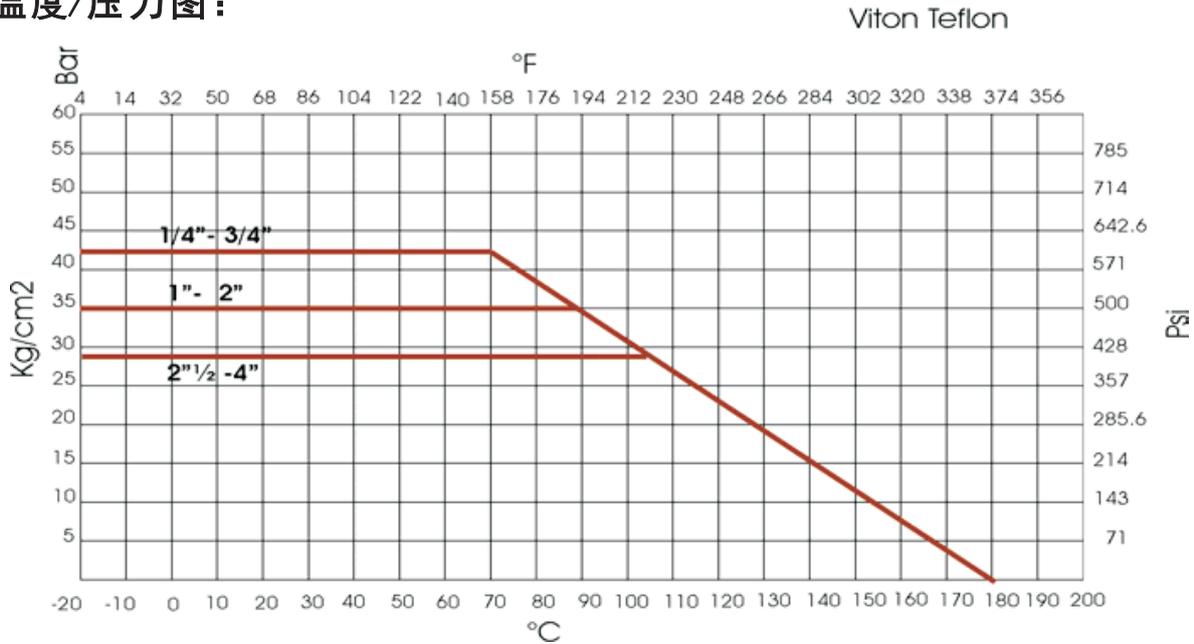

推荐工作温度/压力极限:
 30 bar - 100° C - 非冲击
 10 bar - 150° C - 非冲击