




59

F x F型全流量球阀减速器。  
红蝶把手。

符合EN 13828

## 尺寸

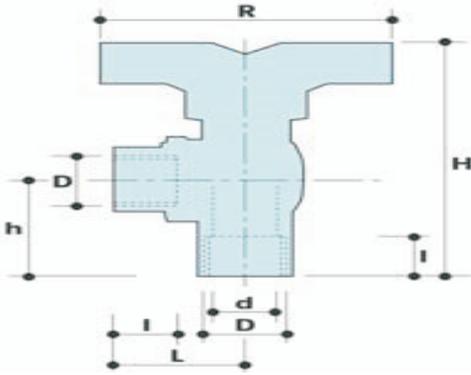

D	1/2"	3/4"	1"
d	15	20	25
H	78	89	109
h	32	35	45
I	17	18	21.5
L	31	35	42
R	58	65	75
Acc.	1	2	3
g	220	340	630

All threads are in accordance with ISO 7/1 or ISO 228

## 材料



本体	CuZn40Pb2 CW617N (DIN 50930 part. 6)
阀球	CuZn40Pb2 CW617N (DIN 50930 part. 6) 钻石抛光和镀铬。
阀杆	CuZn39Pb3 CW614N (DIN 50930 part. 6)
压帽	CuZn39Pb3 CW614N (DIN 50930 part. 6) 可调整。
密封圈	聚四氟乙烯
O型圈	2X氟橡胶 □PTFE密封。
杠杆	铝。

## 可选配件

59 F X F, 红蝶把手  
59/1 F X M, 红蝶把手  
59/2 M X M, 红蝶把手  
59/9 M X F, 红蝶把手


## 可选手柄

59 红蝶把手


APPROVALS(认证)



## 压降图

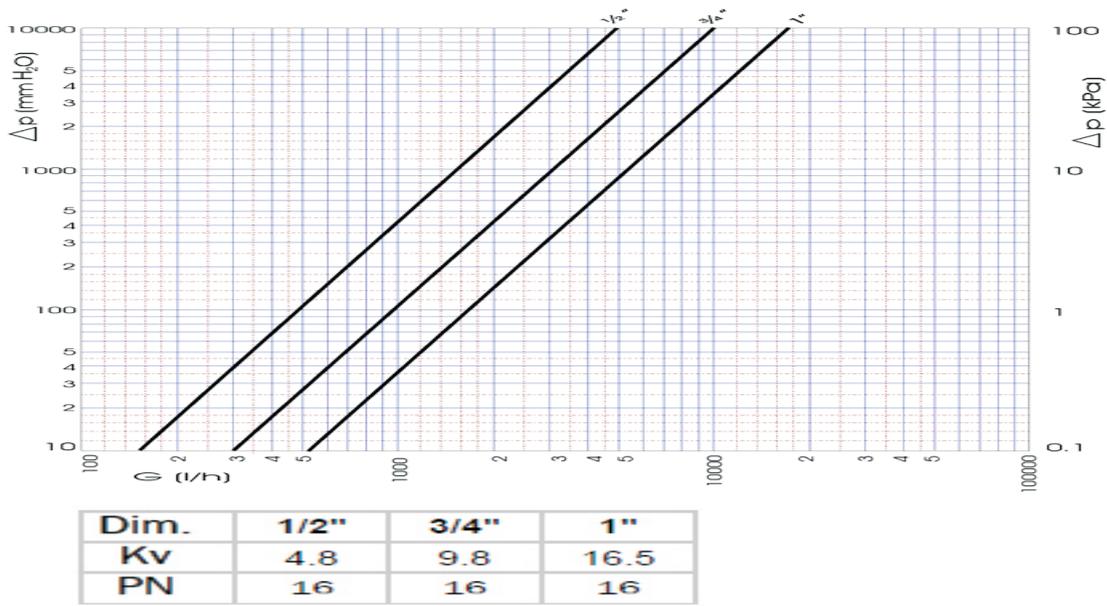

## 温度/压力图

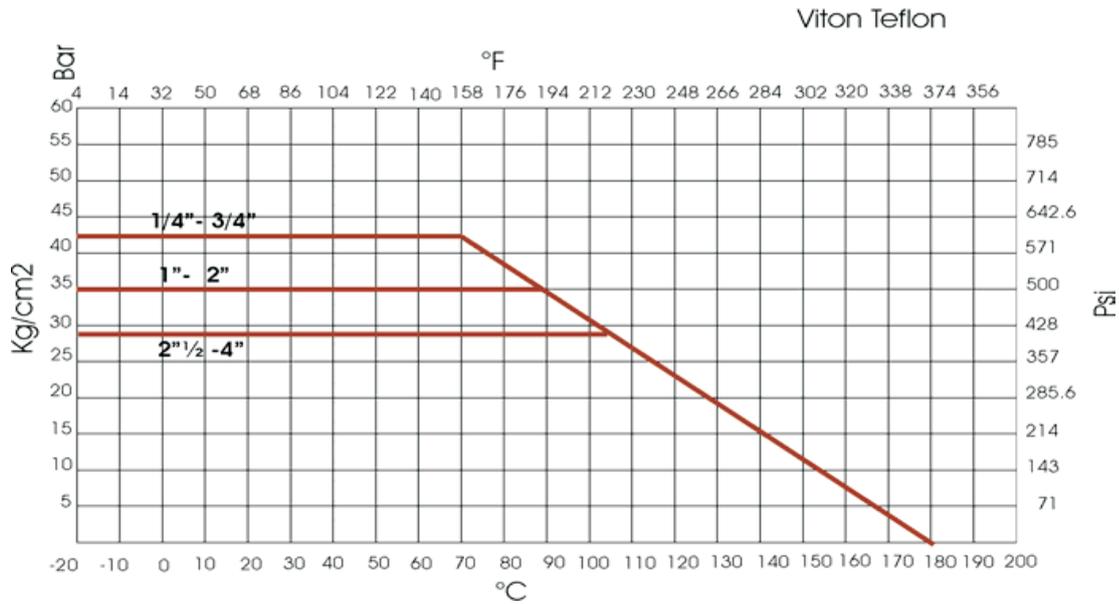

推荐工作温度/压力极限

30 bar - 100° C - 非冲击  
10 bar - 150° C - 非冲击